



# Tsunami.GX 90

## Wireless Point-to-Point Ethernet Bridges

### Fast, Cost-Effective Extension of IP Networks

Proxim's Tsunami™.GX is a full-duplex point-to-point wireless Ethernet bridge with an innovative split-box design. This latest generation of high-capacity wireless bridges is designed to reduce the expense of extending IP networks and to simplify installation. Secure wireless technology significantly reduces total cost of ownership and speeds deployment, while a split-box design adds installation flexibility. The Tsunami.GX also provides best-in-class system performance with native IP interfaces by eliminating the overhead associated with DS3-to-Ethernet connections.

- Perfect for data and data/voice network backhaul applications and for replacing, extending or backing up leased lines
- Indoor-only installation facilitates quick maintenance and easier upgrades
- Indoor/outdoor installation improves system gain and reduces total cost of ownership

### Easily Manage and Troubleshoot Your Wireless Network

Tsunami.GX bridges offer sophisticated, preventative management tools to simplify network maintenance and eliminate downtime. Advanced diagnostic tools identify and isolate potential issues before they impact the network.

- Standards-based SNMP management and web-based GUI simplifies remote management and integrates easily into existing software platforms
- Built-in spectrum analyzer and an alarm log facilitate RF planning and post-deployment tuning

### The Speed of DS-3 with the Ease of Ethernet

Backed by more than 20 years of wireless design innovation, Proxim's Tsunami wireless bridge family

easily and affordably enables network extension, redundancy and backhaul. Tsunami wireless bridges eliminate fiber installation costs and leased line fees to bring you the capacity of DS-3 with the TCO of Ethernet.

- High capacity for bandwidth-intensive applications such as PBX extension, data backhaul and critical link redundancy
- No expensive recurring leased line costs
- Superior system gain ensures consistent, high quality network operation

### Deploy in Days

Because Tsunami bridges operate in license-exempt ISM frequency bands, they can be deployed quickly – eliminating the long lead times associated with leasing lines or trenching new fiber optic cable. This is especially useful in network redundancy and contingency planning.

- Rapid device deployment and flexible re-deployment
- ISPs maintain business continuity, even in severe conditions
- Enterprises minimize costly business application downtime

### Reliable and Secure


A wireless alternative to a wired network yields quality as well as flexibility. Proxim's Tsunami bridges offer the highest security and reliability available in networking today.

- Over 99.999% reliable RF transmission
- Meets or exceeds wired network security
- Proprietary encryption methods ensure secure data transmission



### APPLICATIONS

- Enterprise LAN and PBX extension
- WAN connection redundancy
- ISP remote POP
- ISP direct customer connections using point-to-point
- Multipoint backhaul at DS-3 performance
- Extension of an existing fiber network

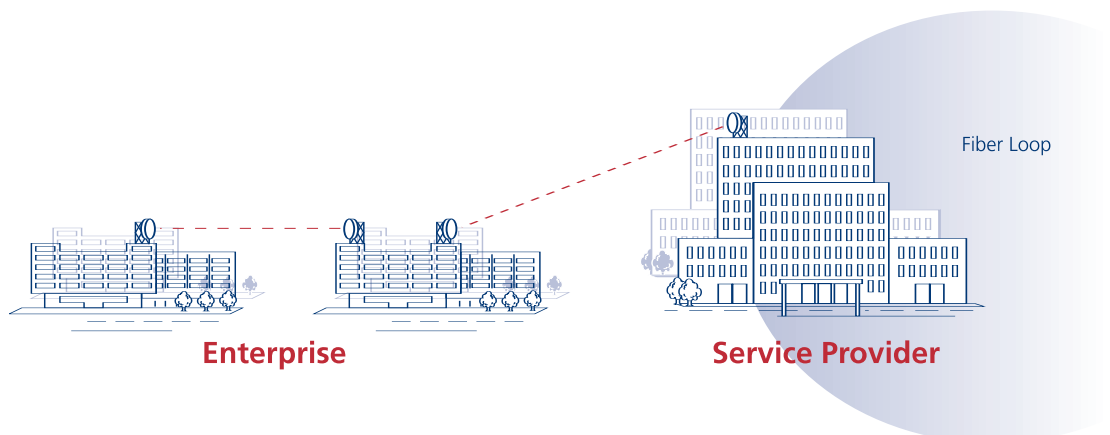

# Tsunami.GX 90 Specifications

## About Proxim

Proxim Corporation is a global leader in wireless networking equipment for Wi-Fi and broadband wireless networks. Proxim provides solutions for mobile enterprise applications, security and surveillance, last mile access, voice and data backhaul, public hot spots, and metropolitan area networks. Product families include ORiNOCO Wi-Fi products, Tsunami Ethernet bridges, and Lynx point-to-point digital radios.

<sup>1</sup> Output power is specified at zero attenuation

<sup>2</sup> Does not include air latency of approximately 5.4 µsec/mile

<sup>3</sup> RF Unit installed outdoors with 6ft. parabolic antenna, 99.995% one-way RF link availability, average climate/terrain, no multipath reflection. Assumes FCC regulations for EIRP

<sup>4</sup> No waysides enabled

Proxim Corporation  
2115 O'Nel Drive  
San Jose, CA 95131

tel: 800.229.1630  
tel: 408.731.2700  
fax: 408.731.3675

www.proxim.com

FREQUENCY	DIGITAL CAPACITY	CHANNEL PAIRS	FCC EMISSION DESIGNATOR	THRESHOLD (BER=1X10 <sup>-6</sup> )	OUTPUT POWER	SYSTEM GAIN	DISTANCE (MILES/KM)
5725-5850 MHz	98 Mbps <sup>4</sup>	1	31M8G7D	<= -80 dBm	≥+23.5 dBm <sup>1</sup>	≥103.5 dB, 106 dB typ.	0 to >33.7/54.4 <sup>3</sup>
5250-5350 MHz	98 Mbps <sup>4</sup>	1	32M5G7D	<= -80 dBm	≥+10.0 dBm <sup>1</sup>	≥89 db, 92 dB typ.	0 to >8.4/13.5 <sup>3</sup>
SYSTEM							
Configuration	Split-box: IDU, RF Unit						
Modulation	QPSK						
Frequency Stability	±10 ppm						
RF Attenuation Range <sup>1</sup>	≥20 dB						
Maximum Receive Signal	-20 dBm error free; 0 dBm no damage						
Error Floor	<10 <sup>-11</sup>						
Latency (T1) <sup>2</sup> , one-way	325 µsec ±10%						
Error Correction	Reed-Solomon						
Security	12 character Link ID (48 bits)						
Regulatory Compliance	FCC Part 15.247; IC RS210						
FCC ID							
Tsunami.GX 90	HZB-S58-GX1						
Tsunami.GX 90 5.3 GHz	HZB-US5358-GX1						
Industry Canada ID	1856A-U5358GX1						
DIGITAL LINE INTERFACES							
Main Data Channel <sup>4</sup>	96 Mbps aggregate 48 Mbps full duplex						
10/100 Base T	RJ-45 modular jack Auto-sense MD/MDI-X						
10/100 Base FX	SC-Type, multi-mode fiber, 1300 nm						
Compliance	IEEE 802.3						
Maximum Packet Size	1536 bytes						
Wayside Data Channels							
T1/E1	DSX-1 (2 each) or CEPT-1 (2 each), software selectable RJ-48C modular jack						
Compliance							
T1	ANSI-1987-T1, CCITT G.823						
E1	G.703						
Orderwire (DTMF)	RJ-11, 100 addresses						
VF	8 pin modular jack, 4-wire 0dBm @ 600 ohm, balanced						
Aux Data (serial)	8 pin modular jack, EIA-561 ≤19.2kbps, selectable, DCE						
FAULT AND CONFIGURATION MANAGEMENT							
Network Management	SNMP v2c (MIB II, Proxim enterprise MIBs), embedded HTML server, Telnet, VT-100 terminal						
Far End Management	Via NMS (embedded router, gateway address, subnet mask), front panel display						
Interfaces							
NMS 1	10/100BaseT, RJ-45, auto-sense						
NMS 2	10/100BaseT, RJ-45, auto-sense						
Configuration (serial)	EIA-574, 9600bps, 9-pin Sub-D, DTE						
External Alarm Interface							
Connector	9-pin Sub-D female						
Outputs	2 Form C Relays (Major, Minor)						
Inputs	2 TTL with internal pull-ups						
POWER/ENVIRONMENT							
Input Voltage Range	-20 to -60 Vdc or +20 to +60 Vdc						
PHYSICAL DIMENSIONS							
	IDU	RF Unit					
Size (in/cm)	17.2 X 10.9 X 1.72/ 43.6 X 27.6 X 4.4	14.1 X 10.9 X 1.72/ 35.8 X 27.6 X 4.4					
Weight (lbs/kg)	6.5/2.9	12.0/5.4					
MECHANICAL							
RF Unit							
Antenna Port (outdoor RF cable not provided)	Type-N female						
IDU Port	TNC female						
Cable to IDU	LMR-240 or equiv. <100m; LMR-400 or equiv. <200m; LMR-600 or equiv. <300m						
Mounting							
IDU	EIA rackmount, 19" or 23", 1RU						
RF Unit	EIA rackmount, 19" or 23", 1RU, or outdoor pole mount bracket (optional)						
FREQUENCY CHANNEL PAIR							
Channel Plan 5.8 GHz Model	5745/5830 MHz						
Channel Plan 5.3 GHz Model	5275/5350 MHz						
ORDERING INFORMATION							
67255	Tsunami.GX Low Band Terminal, 301-57710-61H0						
67254	Tsunami.GX High Band Terminal, 301-57710-61L0						
66722	Tsunami.GX 5.3 GHz Low Band Terminal, 301-57750-51L0						
66723	Tsunami.GX 5.3 GHz High Band Terminal, 301-57750-51H0						
ACC-GX-RF-2	Optional RF Unit Outdoor Mounting Kit						
201-31075-1	Optional AC Adapter 110/220 VAC with cable and connector						
Call for details	ServPak 24x7 Enhanced Service and Support contracts (1yr-3yr)						
SHIPPING CONFIGURATION							
Tsunami.GX 90 IDU (Indoor Unit); 5.8 ISM or 5.3 UNII Low Band or High Band RF Unit; IDU Indoor Rack Mounting Kit; RF Unit Indoor Rack Mounting Kit (includes 12" IDU to RFU TNC-to-TNC cable); Quick Install Guide; CD-ROM User Documentation							

For detailed technical specifications, please go to [http://www.proxim.com/products/bwa/point/tsunami/tsunami\\_gx\\_90/techspecs.html](http://www.proxim.com/products/bwa/point/tsunami/tsunami_gx_90/techspecs.html)